


T.B.VEGAS DUO

UCTVD8/9/12/14A

Your satisfaction, Our priority




Twister Bearing

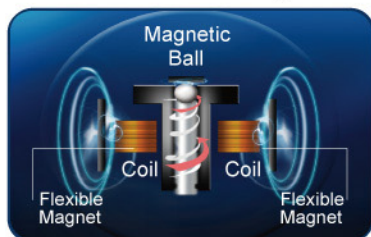

100K Hours Lifetime

Blue/Red Combo-LED with 11 Modes

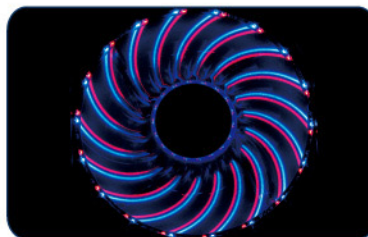

Focus Blades



Fan Blades Detachable



Manual Speed Control



Light Control



Features

- Patented circular type LED with up to 36 (2x18) diodes (12/14cm fan) and five times brighter than other LED fans
- Blue/Red combo-LED with 11 switchable modes
- Focus Blades centering the light to increase brightness
- Turbine Blades for high-pressure airflow
- Twister Bearing technology for long lifetime and low noise
- Manual VR for optimal fan speed control
- Detachable fan blades for easy cleaning
- Isolator-mounts for shockproof and easy installation

T.B.VEGAS DUO

UCTVD8/9/12/14A



Vegas LED Modes

Blue / Red Combo-LED Fan with 11 Modes



* Vegas Mode: blue lighthouse, red lighthouse, combo lighthouse, blue propeller, red propeller, combo propeller, blue triple propeller, red triple propeller, and combo triple propeller repeated
 * The LED modes of 8cm and 9cm fans are identical to 12cm and 14cm fans but with 2 diodes in each group, instead of 3

Specifications

Item	UCTVD8A	UCTVD9A	UCTVD12A	UCTVD14A
Dimension (mm)	82(W)*82(H)*25(D)	92(W)*92(H)*25(D)	120(W)*120(H)*25(D)	139(W)*139(H)*25(D)
Bearing Type	Twister Bearing			
LED Color	Blue/Red Combo-LED			
LED Number	24 (2 colors *12)	24 (2 colors *12)	36 (2 colors *18)	36 (2 colors *18)
LED Type	Circular Type LED with 11 Modes			
Speed (RPM)	900 - 2500 (±10%)	800 - 2300 (±10%)	800 - 1700 (±10%)	700 - 1500 (±10%)
Air Flow (CFM)	16.59 - 38.52	18.05 - 43.30	33.26 - 71.76	42.37 - 90.80
Air Flow (m ³ /h)	28.19 - 65.45	30.67 - 73.56	56.51 - 121.93	71.99 - 154.27
Static Pressure (mm-H ₂ O)	0.915 - 2.209	0.847 - 2.092	0.971 - 2.030	0.855 - 1.772
Rated Voltage (V)	12	12	12	12
Input Current (A)	0.5	0.5	0.5	0.6
Input Power (W)	6	6	6	7.2
MTBF (hour)	100,000			
Minimal Noise (dBA)	17	16	16	15
Accessory	4 x isolator-mounts	1 x 3 to 4 pin adaptor	2 x adhesive tapes	
Safety & EMC				



©2010 ENERMAX Technology Corporation. All rights reserved. Specifications are subject to change without prior notice. Actual products and accessories may differ from illustrations. Omissions and printing errors excepted. Content of delivery might differ in different countries or areas. Some trademarks may be claimed as the property of others.